



Thin Brick



Olde Towne® Thin Brick



510
Olde Charleston Blend



594
Olde Chicago Blend



595
Olde Tavern Blend



596
Olde Manhattan Blend



597
Olde Philadelphia Blend

Olde Towne Thin Brick is a rustic, kiln-flashed "iron-spot" thin brick, offered in earth tone colors with subtle ranging tones and naturally occurring flashing. A rustic, "old world" looking thin brick with the precision sizing and the tight tolerances that are required in tilt-wall and pre-cast installations.....at a competitive price.


The LANDMARK Series




01006 Olde Salem
A red-bodied range with subtle, iron-fired flash




01024 Fredericktown
A red-bodied range with subtle to medium gun-metal flash



01009 Elkton
A red-bodied range with medium flash




01034 Hanover
A red-bodied range with medium to dark flash



01012 Dungannon
A red-bodied range with subtle, light flash

Available in five rustic and handcrafted colors, Summitville LANDMARK Series portrays a luminescent glow in the sunlight and a shadowed, rustic patina in darker areas. Factory blends are available for more unique and custom looks.

Summitville® Thin Brick Blends



B597
Olde Philadelphia Colonial Blend



B595
Olde Tavern Colonial Blend




B594
Olde Chicago Colonial Blend



B510
Olde Charleston Colonial Blend



B505
Olde Germantown Blend



B506
Olde Jamestown Blend



B205
Lexington Blend



B185
Concord Blend




B109
Andover Blend



B208
Newport Blend



B209
Richmond Blend



B210
Dover Blend



B211
Cambridge Blend



B174*
Alexandria Flashed Blend



B124*
Yorktown Flashed Blend




B118*
Valley Forge Flashed Blend

Custom blend options are available from all colors and all ratios, contact Summitville to create your custom blend. Custom flashed blends (*) are available in all 15 Thin Brick colors. Minimum order quantity may be required, contact Summitville for additional information. Summitville Thin Brick specification standards conform to ASTM C1088 (type TBX, exterior grade) and PCI specification for Embedded Clay Thin Brick.

For dimensions, specifications and installation methods go to: www.summitville.com

Summitville Thin Brick

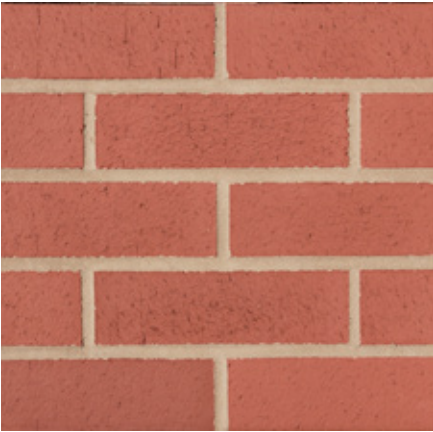

10 Summitville Red
Range of deep red shades



14 Alexandria
Range of medium red shades



95 New Bedford
Range of warm red shades



16 Plymouth
Range of medium rust brown shades



17 Yorktown
Range of red tan shades



15 Providence
Range of red brown shades



94 Colony
Range of light tan shades



96 Williamstown
Range of medium tan shades



19 New Amsterdam
Range of light brown shades



26 Savannah
Range of light buff shades



97 Valley Forge
Range of deep warm brown shades



24 Boston
Range of dark gray shades



81 Charcoal
Range of deep charcoal shades



21 Raleigh
Range of light tan gray shades



27 Georgetown
Range of light tan-buff shades


Summitville offers Thin Brick in 15 colors. Each color offers a range of shades. Thin Brick is made from select clays and shale chosen for their relative purity, fired strength and proven physical characteristics.

Stock Sizes:
2-1/4 x 7-5/8 x 9/16"
3-5/8 x 11-5/8 x 9/16"


Face Brick and other custom sizes are available, minimum quantity may be required.

Sizes Available


Modular



2-1/4x7-5/8x9/16"




BC-248 Corner
2-1/4x3-5/8x7-5/8"




BT-248 Edge Cap
2-1/4x3-5/8x7-5/8"


Closure



3-5/8x7-5/8x9/16"




BC-448 Corner
3-5/8x3-5/8x7-5/8"




BT-448 Edge Cap
3-5/8x3-5/8x7-5/8"


Utility

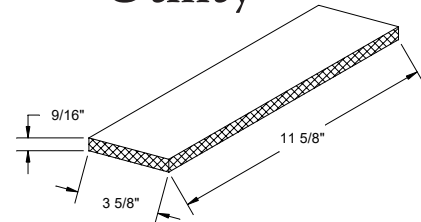

3-5/8x11-5/8x9/16"

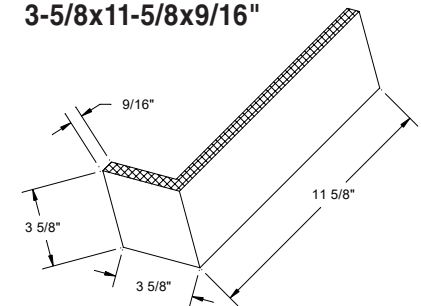

BC-44C Corner
3-5/8x3-5/8x11-5/8"

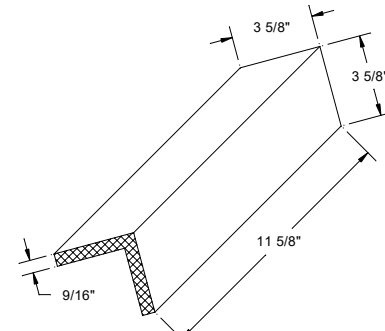

BT-44C Edge Cap
3-5/8x3-5/8x11-5/8"

- Other custom sizes and 1-inch thicknesses are available – minimum order quantities may apply
- Olde Towne Thin Brick and Blends B597, B595, B594, B510, B505 & B506 available in Modular size only
- Landmark Series is only available in Modular size – Thickness is 11/16"
- All wirecut colors and blends B205, B185, B109, B208, B209, B210, B211, B174, B124 & B118 available in all sizes. Colors #10 Summitville Red & #15 Providence not available in Utility size.

Specification	Test	Standard	Summitville Thin Brick
Efflorescence	ASTM C 67	None	Not Efflorescent
Chipping	ASTM C 1088	Max 5%	< 2%
Size	ASTM C 1088	TBX Grade	Exceeds Standard
Warpage	ASTM C 1088	TBX Grade	Exceeds Standard
Modulus of Rupture	ASTM C 67	Min. 250 PSI	500 PSI
Compressive Strength	ASTM C 67	None	10,000 PSI
Absorption	ASTM C 1088	Max. 17%	< 6%
Freeze Thaw – Brick	ASTM C 67	Min 50 Cycles	Exceeds Standard
Freeze Thaw – Precast Concrete Assembly, PCI	ASTM C 666	300 Cycles	Passed, Meets Standard
Tensile Bond, PCI	ASTM E 488 / Modified	Min 150 PSI before and after 300 cycles	Passed, Meets Standard
Shear Bond Strength (to Portland Cement)	ASTM C 482	Min 50 PSI	> 150 PSI
Chemical Resistance	ASTM C 650	Not Affected	Not Affected

Summitville Thin Brick specification standards conform to ASTM C1088 (type TBX, exterior grade) and PCI specification for Embedded Clay Thin Brick.



 **Summitville[®]**
Thin Brick



Summitville®

Summitville Tiles Inc. • Summitville, Ohio 43962
330-223-1511
www.summitville.com

